

FRAMELESS SOLAR GLASS


Semi-Opaque

High Efficiency Mono Module

195 W

1000V

ENGINEERING DRAWING (mm)

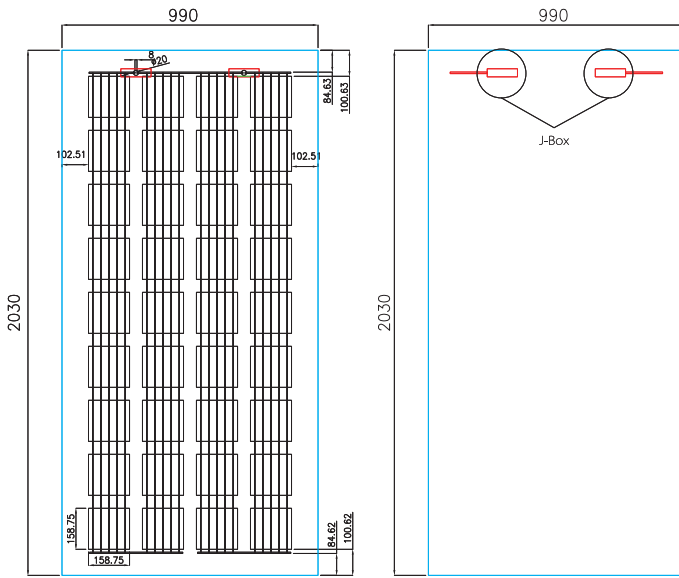

ELECTRICAL DATA | STC*

SPECIFICATIONS

Nominal Max. Power (Pmax)

MPP Operating Voltage (Vmp)

MPP Operating Current (Imp)

Open Circuit Voltage (Voc)

Short Circuit Current (Isc)

Cell Efficiency

Operating Temperature

Max. System Voltage

Max. Series Fuse Rating

Application Classification

FRAMELESS SOLAR GLASS - SEMI-OPAQUE

195W

20.9V

9.31A

24.1V

9.77A

22% - 22.5%

-40°C ~ +85°C

1000V (IEC/UL)

20A

Class A

MECHANICAL DATA

SPECIFICATIONS

Cell Type

Cell Arrangement

Overall Dimensions

Front Cover

Back Cover

Weight

J-Box

Cable

Cable Length (Including Connector)

Connector

FRAMELESS SOLAR GLASS - SEMI-OPAQUE

Mono-crystalline

36 (9x4)

2030x990x7mm

3.2 mm tempered glass

3.2 mm tempered glass

35kg

IP68, 2 bypass diodes

4mm², 12 AWG (UL)

1000mm, 1200mm

MC4

TEMPERATURE CHARACTERISTICS

SPECIFICATIONS

Temperature Coefficient Pmax

Temperature Coefficient Voc

Temperature Coefficient Isc

Nominal Module Operating Temperature



FRAMELESS SOLAR GLASS - SEMI-OPAQUE

-0.36% / °C

-0.30% / °C

0.046% / °C

42 ± 3°C




Learn More:

 mitrex.com

 info@mitrex.com


Headquarters:

 41 Racine Rd., Toronto, ON M9W 2Z4, Canada

 +1 (416) 497 7120

West USA Location:

 10880 Wilshire Blvd Suite 1101, Los Angeles, CA 90024, USA

 +1 (323) 301 7978

East USA Location:

 1 Rockefeller Plaza Fl 11, New York, NY 10020, USA

 +1 (646) 583 4486