

SOLAR PANEL M405-L3H


Half-Cell / Bifacial

High Efficiency Module

405W

1500V

ENGINEERING DRAWING (mm)

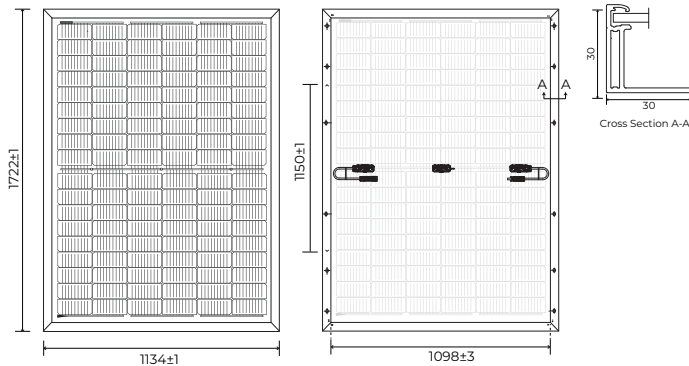

ELECTRICAL DATA | STC

MITREX	SOLAR PANEL M405-L3H - BIFACIAL
Nominal Max. Power (Pmax)	405W
MPP Operating Voltage (Vmp)	31.11V
MPP Operating Current (Imp)	13.02A
Open Circuit Voltage (Voc)	37.55V
Short Circuit Current (Isc)	13.73A
Maximum Efficiency	21%
Operating Temperature	-40°C ~ +85°C
Max. System Voltage	1500V (IEC/UL)
Max. Series Fuse Rating	25A
Fire Classification	Type I




MECHANICAL DATA

SPECIFICATIONS	SOLAR PANEL M405-L3H - BIFACIAL
Cell Type - Size	Mono-crystalline - M10, 182mm
Cell Arrangement	108 [(6x9)x2]
Dimensions	1722 x 1134 x 30mm
Front Cover	3.2 mm tempered glass
Back Cover	Transparent Backsheet
Frame	Anodized aluminum alloy black frame
Weight (kg)	20.7 ± 1
J-Box	IP68, 3 bypass diodes
Cable	4mm ² , 12 AWG (UL)
Cable Length (including Connector)	300mm
Connector	MC4
Max. Static Load Front/Back	5400/ 2400 Pa

TEMPERATURE CHARACTERISTICS

SPECIFICATIONS	SOLAR PANEL M405-L3H - BIFACIAL
Temperature Coefficient Pmax	-0.341% / °C
Temperature Coefficient Voc	-0.262% / °C
Temperature Coefficient Isc	0.054% / °C
Nominal Module Operating Temperature	42.5 ± 2°C

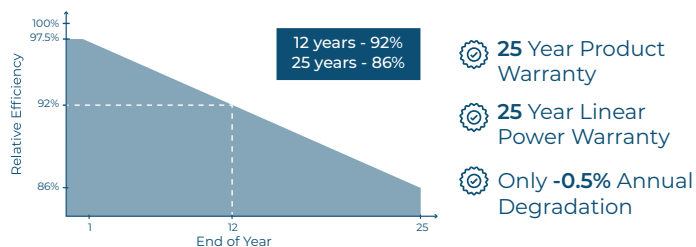

LINEAR PERFORMANCE WARRANTY





- Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.

- Caution: For professional use only, the installation, handling, and cleaning of PV modules should only be performed by qualified professionals.



Learn More:

 mitrex.com
 info@mitrex.com

Headquarters:

 41 Racine Rd., Toronto, ON M9W 2Z4, Canada
 +1 (416) 497 7120 (Office Number)
 +1 (855) 254 0214 (Toll Free)

West USA Location:

 10880 Wilshire Blvd Suite 1101,
Los Angeles, CA 90024, USA
 +1 (323) 301 7978

East USA Location:

 1 Rockefeller Plaza Fl 11,
New York, NY 10020, USA
 +1 (646) 583 4486