

SOLAR CLADDING


Rubrica Facing With Aluminum Honeycomb

High Efficiency Mono Module

265W

1000V

ENGINEERING DRAWING (mm)

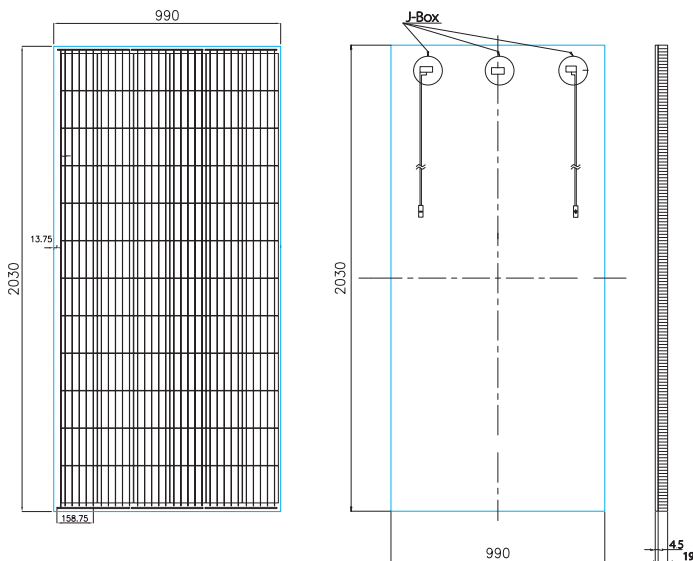

ELECTRICAL DATA | STC*

SPECIFICATIONS

Nominal Max. Power (Pmax)

MPP Operating Voltage (Vmp)

MPP Operating Current (Imp)

Open Circuit Voltage (Voc)

Short Circuit Current (Isc)

Module Efficiency

Operating Temperature

Max. System Voltage

Max. Series Fuse Rating

Application Classification

SOLAR CLADDING RUBRICA

265W

40.7V

6.51A

48.3V

6.93A

13.1%

-40°C ~ +85°C

1000V (IEC/UL)

20A

Class A

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

MECHANICAL DATA

SPECIFICATIONS

Cell Type

Cell Arrangement

Dimensions

Front Cover

Weight

Back Support

J-Box

Cable

Cable Length (including Connector)

Connector

Max Static Load Front/Back

SOLAR CLADDING RUBRICA

Mono-crystalline

72 (12x6)

2030x990x24mm

3.2 mm tempered glass

29kg

Aluminum Honeycomb

IP68, 3 bypass diodes

4mm², 12 AWG (UL)

300mm, 500mm, 1000mm, 1,200mm

MC4

2400Pa/2400Pa

SPECIFICATIONS

Temperature Coefficient Pmax

Temperature Coefficient Voc

Temperature Coefficient Isc

Nominal Module Operating Temperature

SOLAR CLADDING RUBRICA



-0.36% / °C

-0.27% / °C

0.036% / °C

42 ± 3°C

TEMPERATURE CHARACTERISTICS




Learn More:

 mitrex.com

 info@mitrex.com

Headquarters:

 41 Racine Rd., Toronto, ON M9W 2Z4, Canada

 +1 (416) 497 7120

West USA Location:

 10880 Wilshire Blvd Suite 1101, Los Angeles, CA 90024, USA

 +1 (323) 301 7978

East USA Location:

 1 Rockefeller Plaza Fl 11, New York, NY 10020, USA

 +1 (646) 583 4486